


RH8

RO Membrane Housing
(High Pressure Type)

Design P.	300psi
Design T.	100
Max Operating P.	300psi
Operating T.	75

Features

1. Efficient filtering with High flow velocity
2. Tightly seal of top&bottom cover and shell.
3. Strong consistency of RH8 menbrancand allows for excellent duralibiltye.

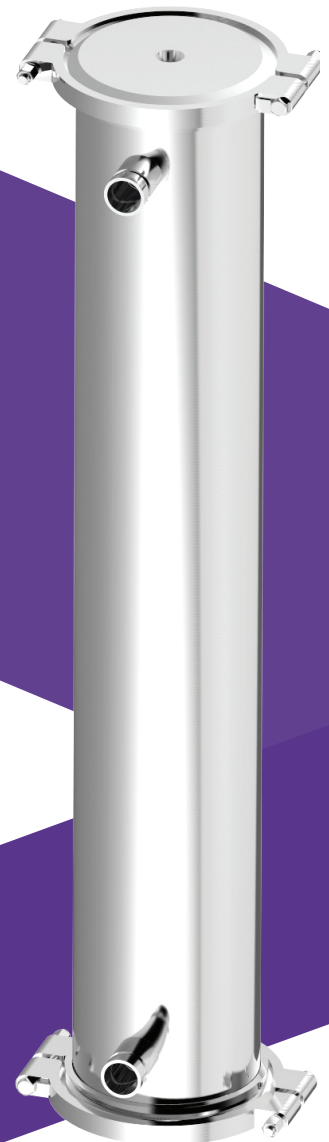


Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treament
High temperature manufacturing processes	Electronic Industry



RH8 Ordering Guide

RL8	4	4	1	PF	1	V	E	BA
Model	Length	Shell Matrial	N1 Size	N1 Type	N2 Size	N2 Type	O-ring	Outside / Inside Finishes
RH8	4-40" 8-80" 12-120" 16-160" 20-200"	4-304 6-316	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Adapter C-CLAMP	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Adapter C-CLAMP	E-EPDM N-NBR V-VITON	B-Burnishing A-Acid pickling P-Polishing

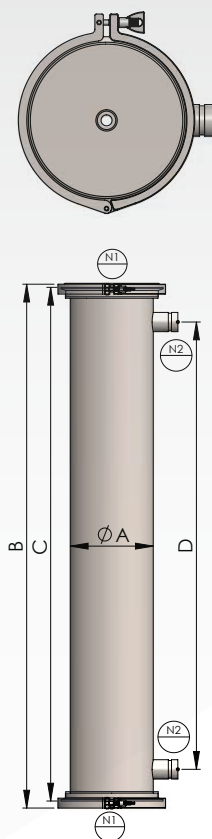

RH8 Specifications

Model	A m/m	B m/m	C m/m	N1	N2	Weight
RH8-4	Ø216	1197	1300	1"	1-1/2"	64kg
RH8-8	Ø216	2353	2316	1"	1-1/2"	100kg
RH8-12	Ø216	3369	3332	1"	1-1/2"	136kg
RH8-16	Ø216	4385	4348	1"	1-1/2"	172kg
RH8-20	Ø216	5401	5364	1"	1-1/2"	208kg